
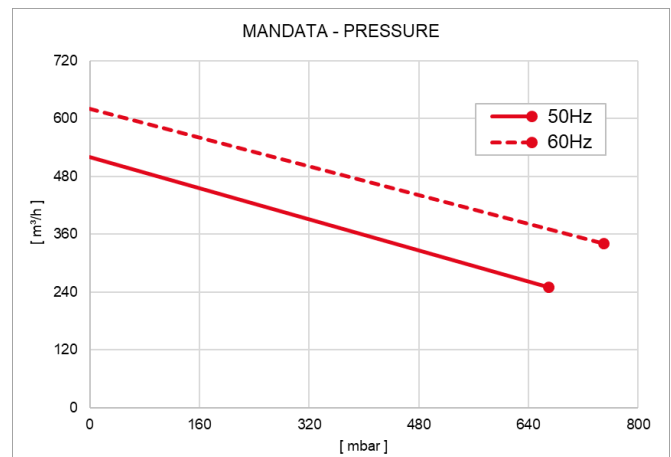


Modello - Model		TDL 550-2	
		50Hz	60Hz
Codice catalogo - Catalogue code		9413016	
Potenza motore - Motor power (3~) kW		15.0	17.3
IE3	Alimentazione - Power supply V \pm 10% (Δ / Y)	400 / 690	460 / 795
	Efficienza - Efficiency %	91.9	91.7
Alimentazione - Power supply V \pm 5% (Δ / Y)		345-415 / 600-720	380-480 / 660-830
Assorbimento - Absorption A (Δ / Y)		35.8-29.8 / 20.7-17.2	41.8-33.1 / 22.1-19.2
Portata - Flow rate m ³ /h		520	620
Vuoto - Vacuum mbar		-460	-490
Sovrappressione - Pressure mbar		+670	+750
Rumorosità - Noise level (UNI EN ISO 2151 - K 3dB) dB(A)		74	78
Peso - Weight kg [N]		120 [1176]	

Subject to change without prior notice

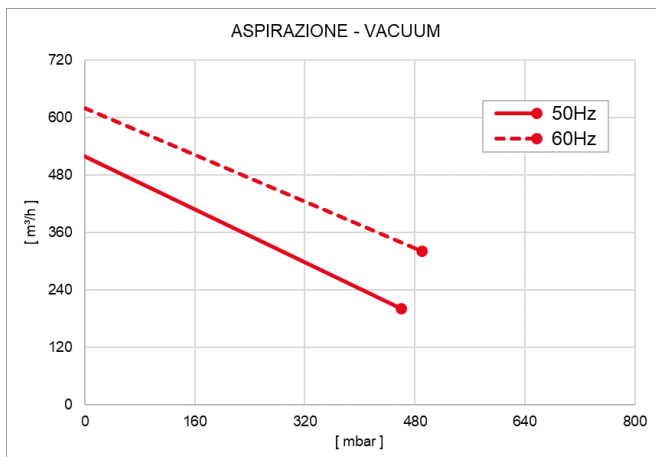

Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza \pm 10%)
 Curves refer to 1013mbar (Abs.) pression and 20°C temperature (tolerance \pm 10%)