
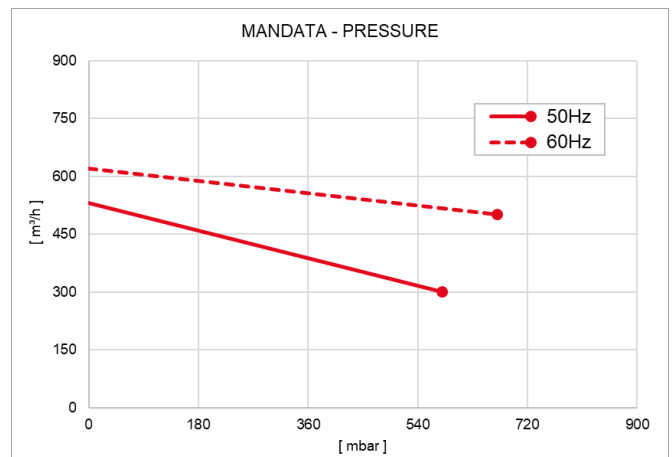


| Modello - Model  |  | TTL 550               |                       |
|--|--|-----------------------|-----------------------|
|  |  | 50Hz                  | 60Hz                  |
| Codice catalogo - Catalogue code                         |  | 9414002               |                       |
| Potenza motore - Motor power (3~) kW                     |  | 11.0                  | 12.6                  |
| IE3  | Alimentazione - Power supply V $\pm$ 10% ( $\Delta$ / Y) | 400 / 690             | 460 / 795             |
|  | Efficienza - Efficiency %                                | 91.2                  | 91.0                  |
| Alimentazione - Power supply V $\pm$ 5% ( $\Delta$ / Y)  |  | 345-415 / 600-720     | 380-480 / 660-830     |
| Assorbimento - Absorption A ( $\Delta$ / Y)              |  | 30.8-25.6 / 17.8-14.9 | 35.1-27.8 / 18.6-16.1 |
| Portata - Flow rate m <sup>3</sup> /h                    |  | 530                   | 620                   |
| Vuoto - Vacuum mbar                                      |  | -550                  | -580                  |
| Sovrappressione - Pressure mbar                          |  | +580                  | +670                  |
| Rumorosità - Noise level (UNI EN ISO 2151 - K 3dB) dB(A) |  | 75                    | 79                    |
| Peso - Weight kg [N]                                     |  | 185 [1813]            |                       |

Subject to change without prior notice

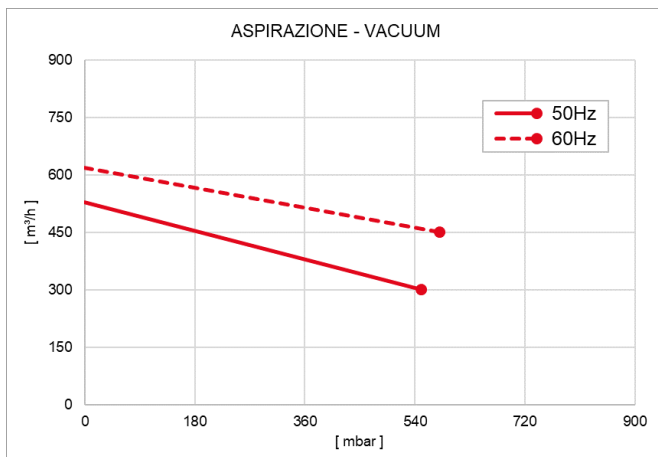

Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza  $\pm$ 10%)  
 Curves refer to 1013mbar (Abs.) pression and 20°C temperature (tolerance  $\pm$ 10%)